



MIPOLAM® ATLAS®

gerflor.com  
gerflor.asia



**Gerflor**<sup>®</sup>  
theflooringgroup

**Performances and benefits**



Excellent abrasion resistance



Matt finish surface: enhanced design & colour



Available in 2 m sheet



Homogeneous vinyl flooring suitable for heavy duty traffic areas



Highly flexible homogeneous flooring, easy to install & weld



Non-directional design available in 16 references

**FEWER VOC'S, BETTER INDOOR AIR QUALITY**



**COMPOSITION**  
100% REACH compliant

- FREE of formaldehyde
- FREE of heavy metals
- FREE of solvent



**WELLNESS**

**Health**

- Antibacterial activity (inhibits growth > 99 %)



**INDOOR AIR QUALITY**

- TVOC emissions 100 times lower than norm requirements (TVOC <10 µg/m³ after 28 days)
- Floorscore certified
- M1 certified
- Comply with AgBB protocol
- No formaldehyde emission



**RECYCLABILITY**

- 100 % recyclable product



**RECYCLED CONTENT**

- 100 % REACH compliant recycled content

**INSTALLATION**

Installation should be carried out in accordance with local standards. Subfloor should be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatize 24 hours before installation in a room temperature of between 18-24°C. All seams must be hot welded using Gerflor® matching welding rod.

**MAINTENANCE**

No emulsion dressing is required. Maintenance should be carried out regularly to retain in the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser. More intense cleaning should be carried out using a fine spray cleaning pad under a floor machine, or for larger areas combined machine cleaning.

⚠ Rubber leaves indelible stains on vinyl flooring: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide.

# MIPOLAM® ATLAS®


easyCare™





EASYCARE™

34-43


100 % recyclable

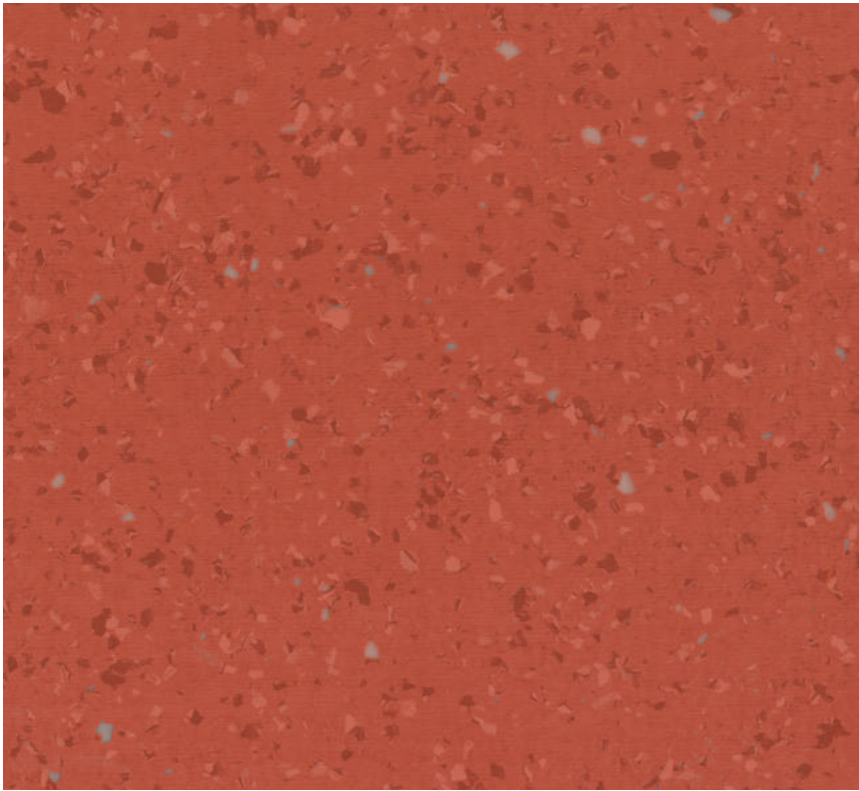


6015 Rubine

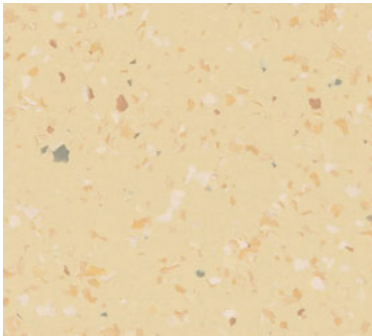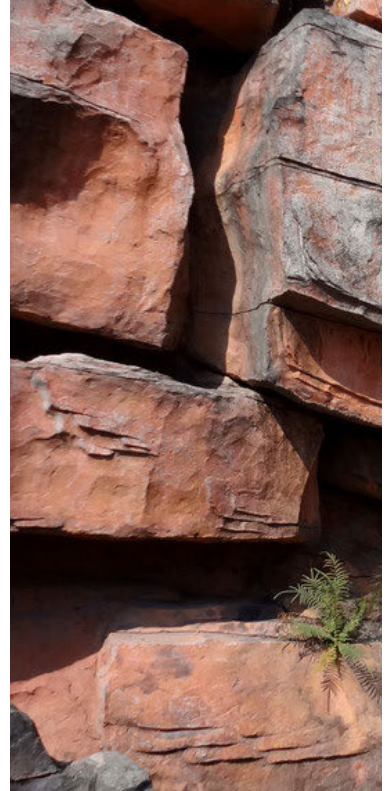

6014 Primrose

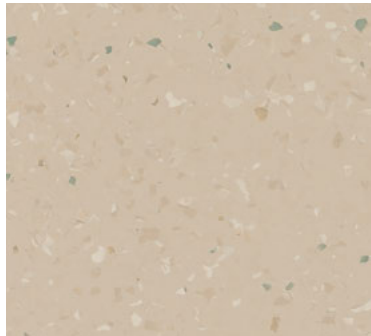


6002 Sand Beige

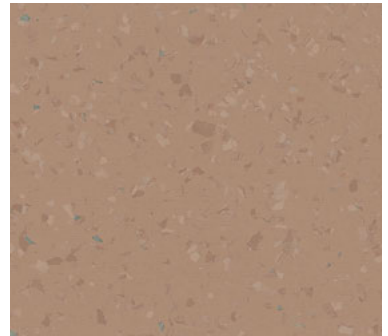


6008 Sienna




Compact sheet, without foam backing

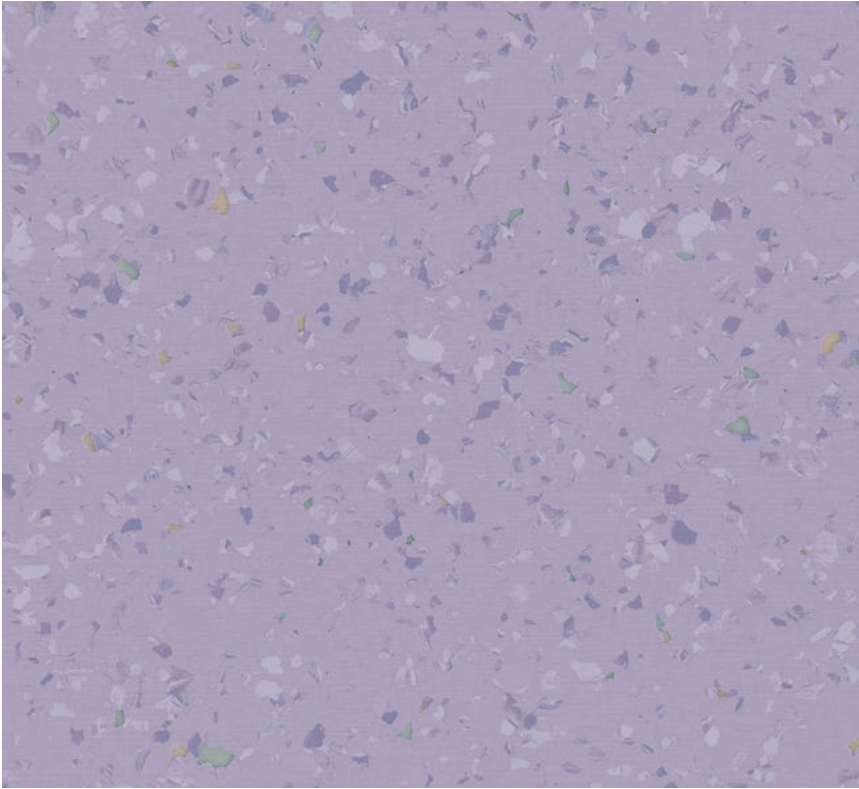


6016 Paleviolet

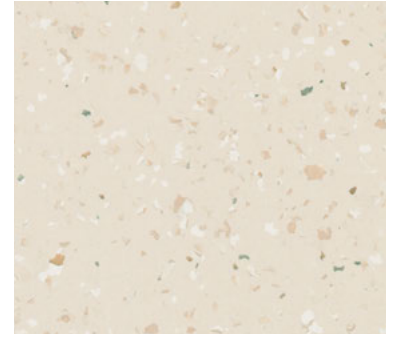

6013 Apricot

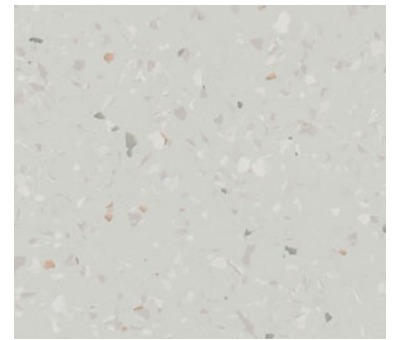


6004 Creamy White

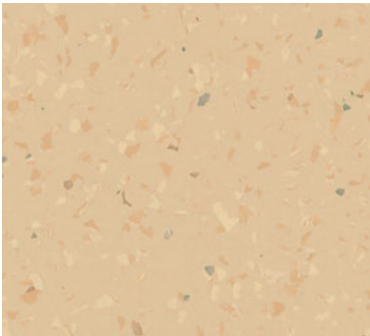

6003 Sand Brown




6012 Sand

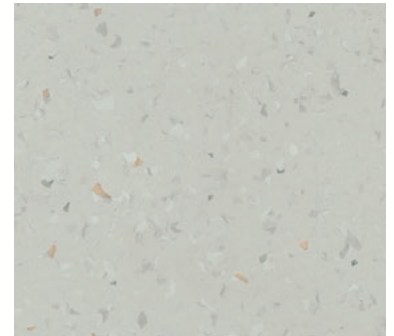


6001 Argilla




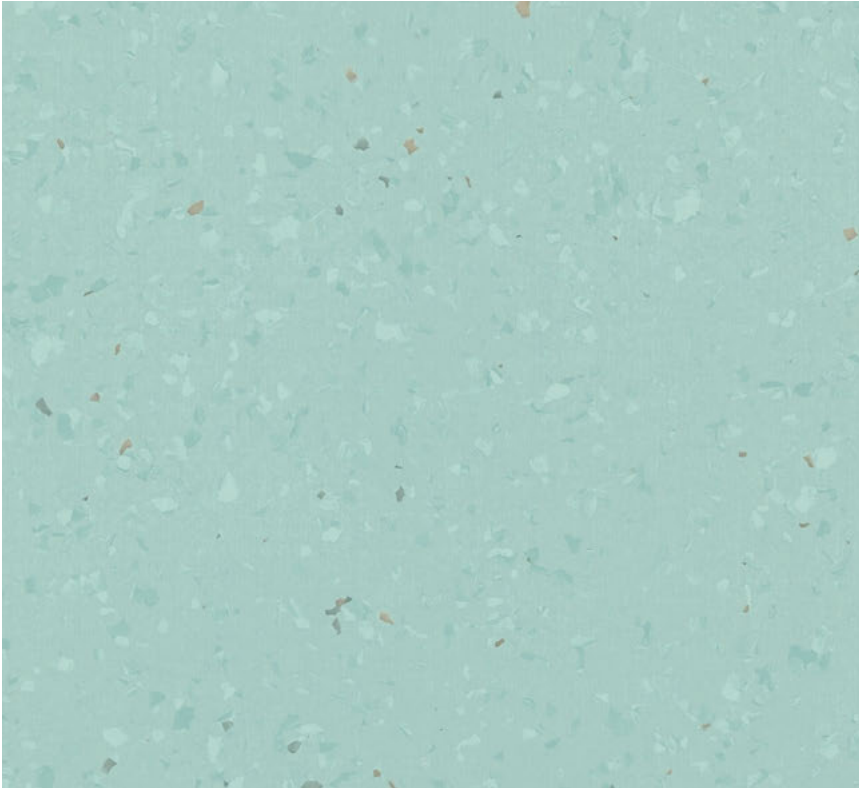


6006 Spring Green

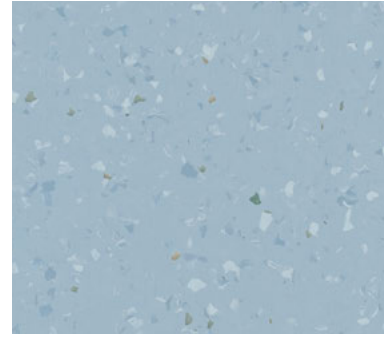


6007 Slate Blue

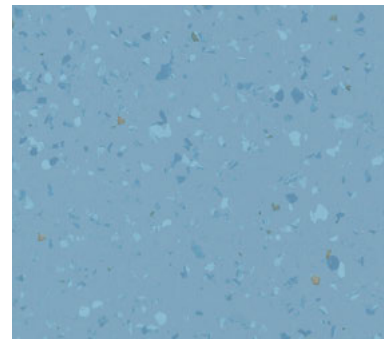


6010 Powder Blue

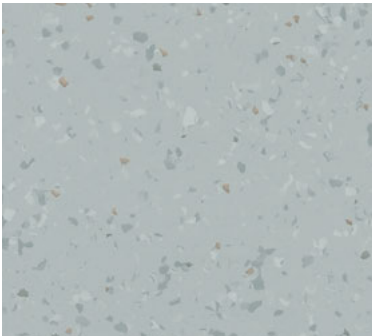

6005 Slate Grey

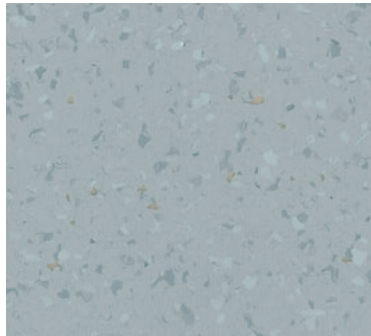

6011 Rocky Grey

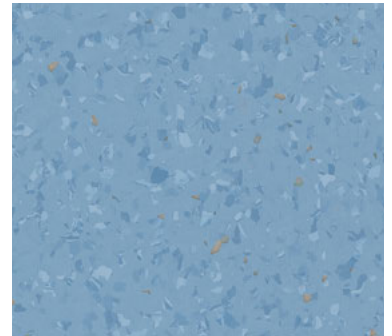

6009 Royal Blue



## MIPOLAM® ATLAS®

### DESCRIPTION

Total thickness	ISO 24346 (EN 428)	mm	2
Weight	ISO 23997 (EN 430)	g/m <sup>2</sup>	2995
Width / Length of sheet	ISO 24341 (EN 426)	cm / lm	200 / 20

### CLASSIFICATION

Norm / Product specification	-	-	ISO 10581(EN 649)
European classification	ISO 10874 (EN 685)	class	34 - 43
Fire rating	EN 13 501-1	class	Bfl-s1
Static electrical propensity	EN 1815	KV	<2
Electrical resistance	EN 1081	Ω	10 <sup>9</sup> -10 <sup>10</sup>
Slip resistance dry	EN 13893	-	≥0.3
Slip resistance wet	DIN 51130	class	R9

### PERFORMANCES

Wear resistance	EN 660.2	mm <sup>3</sup>	≤2.0
Wear group	EN 649	group	T
Type binder content	ISO 10581	type	I
Dimensional stability	ISO 23999 (EN 434)	%	≤ 0.4
Residual indentation	ISO 24343-1 (EN 433)	mm	≈0.04
Castor chair test	ISO 4918 (EN 425)	-	OK
Thermal conductivity	ISO 10456 (EN 12524)	W/(m.K)	≈0.25
Colour fastness	ISO 105 - B02	degree	≥ 6
Chemical products resistance	ISO 26987 (EN 423)	-	OK
Anti-bacterial and fungicidal treatment	-	-	OK
Surface treatment	-	-	EASYCARE™
Color number	-	-	16

### ENVIRONMENT / INDOOR AIR QUALITY

TVOC after 28 days	ISO 16000 - 6	µg/m <sup>3</sup>	< 10
--------------------	---------------	-------------------	------

### CE MARKING

CE	EN 14041	-	

MIPOLAM® ATLAS® is a flexible homogeneous pressed compacted floorcovering in sheet, with non-directional design color dyed as a raw mixture to ensure color throughout the thickness. Its surface is densely compacted for improved wear and ease of maintenance. It benefits from EASYCARE™ surface treatment with good resistance to chemicals and to scuffing, and high resistance to scratches and staining. Easy to clean. No wax for life!

MIPOLAM® ATLAS® features bacteriostatic and fungistatic treatments. The flooring complies with the EN 649 (34-43) and has a Group T wear rating. It is suitable for heavy traffic areas.

### Gerflor Don't forget our complementary ranges!



### MIPOLAM® ATLAS®, LESS SPEAKING FOR MORE ACTIONS

<p><b>COMPOSITION</b> 100% REACH compliant FREE of formaldehyde FREE of heavy metals FREE of solvent</p>	<p><b>RECYCLED CONTENT</b> 100% REACH compliant recycled content</p>	<p><b>RECYCLABILITY</b> 100% recyclable product</p>	<p><b>INDOOR AIR QUALITY</b> TVOC emissions between 10 and 100 times better than norms requirements Floorscore certified No formaldehyde emission</p>	<p><b>INSTALLATION</b> Innovative adhesive free installation systems</p>	<p><b>WELLNESS</b> Health: Antibacterial activity (inhibits growth &gt; 99%)</p>
--	--	---	---	--	--

### Be connected!



www.gerflor.com

#Gerflor

**Gerflor®**  
the flooring group

GERFLOR ASIA Tel.: + 86-21-63578818

APR 2018-04-15 Version-Indicative documentation cost USD 3.0  
Gerflor® has a policy of continuous product improvement, it reserves the right to change design and specifications without notice.